


**Technisch informatieblad**

D'Alessandro ketels CSI 20 - 100

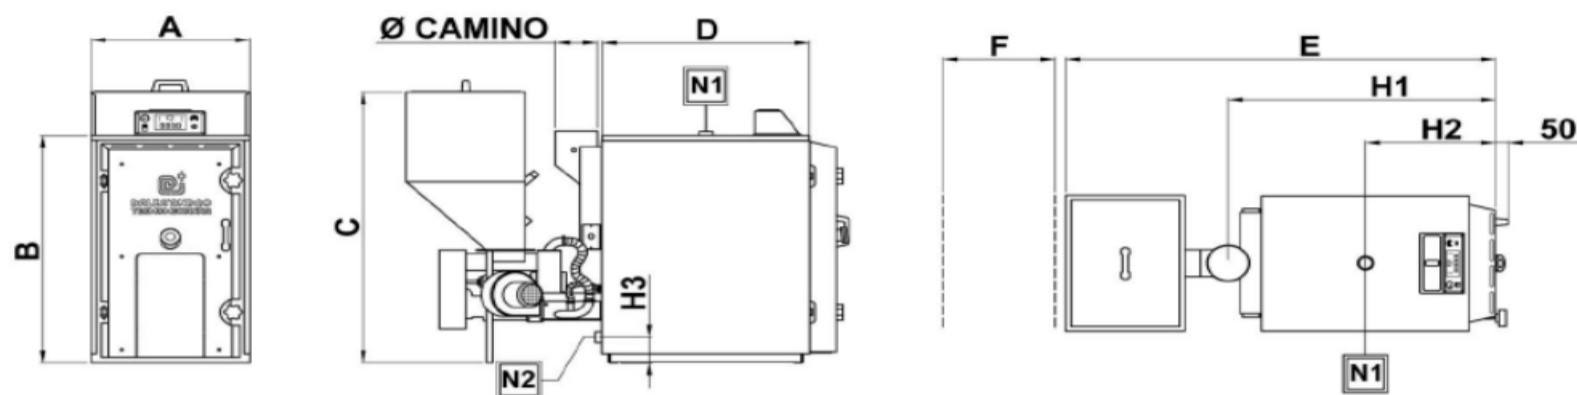

Model		CSI 20	CSI 30	CSI 40	CSI 60	CSI 80	CSI 100
Norminaal vermogen	kW	20	30	40	60	80	100
Opgenomen vermogen (400V)	kWh	0,21	0,21	0,21	0,24	0,24	0,24
Brandstofverbruik indicatief op maximaal vermogen	kg/u	4,41	5,81	9,38	13,9	18,6	23,17
Soort brandstof		Houtchips 20x30x40 mm					
Maximale werkdruk	bar	3					
Maximale watertemperatuur	°C	90					
<b>Afmetingen</b>							
A	mm	600			700		
B	mm	1010			1160		
C	mm	1210			1410		
D	mm	485	635	785	785	1035	1285
E	mm	1330	1480	1630	1690	1940	2190
F	mm	500					
H1	mm	685	830	980	1040	1290	1540
H2	mm	345	420	495	420	420	420
H3	mm	115			130		
<b>Aansluitingen</b>							
N1 water uit	DN	40					
N2 water in	DN	40					
<b>Overige</b>							
Inhoud brandstofhopper	l	140	140	140	190	190	190
Waterinhoud ketel	l	75	90	120	170	220	270
Ledig gewicht	kg	250	280	300	350	400	450
Rookgasafvoer diameter	mm	160	160	160	200	200	200
Onderdruk	Pa	20					
Gemiddelde rookgastemp. bij schone installatie	°C	170					